L5 Linear Igor Style

LP-L5-P60-72 IG DALI 830

Art. No 553331314






90°				9
75°			W.	7
60°		200		
45°		300		
7		500		\nearrow
30°	15°	0°	15°	η = 100

Luminous flux	2240 lm
Luminaire efficiency	112 lm/W
CRI	> 80
Correlated colour temperature	3000 K
Rated power	20 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.086 A
Working voltage	AC 220-240 V
Ingress protection code	IP33
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	653x124x111 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

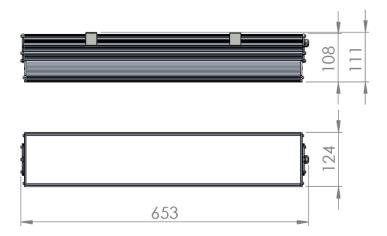

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.