


# Downlight Slim Style



## LP-LU-200ASL13 Phase Cut 830

Art. No 570321455

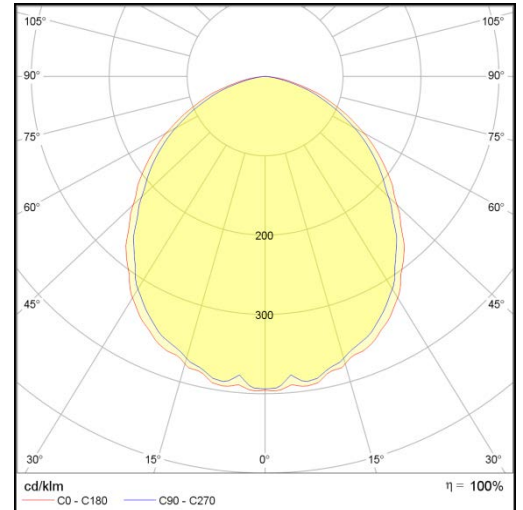


Luminous flux	1250 lm
Luminaire efficiency	96 lm/W
CRI	> 80
Correlated colour temperature	3000 K
Rated power	13 W
LED	Samsung LM561B
Dimmable	YES - to 10%
Input current	0.056 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	80 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Installation	Recessed in suspended ceilings
Dimensions – LxWxH	Ø218x56 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

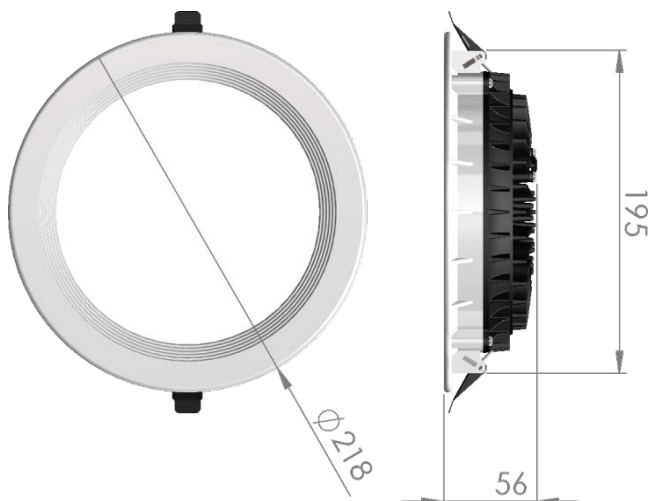

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.