


Downlight Slim Style



LP-LU-200BSL20 DALI 850

Art. No 570531469

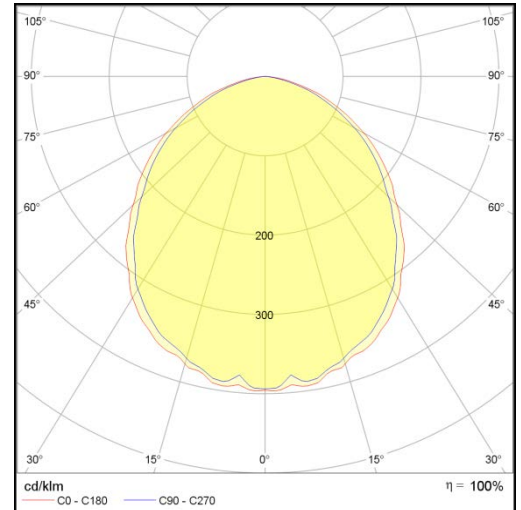


Luminous flux	2320 lm
Luminaire efficiency	116 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	20 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.086 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	80 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Installation	Recessed in suspended ceilings
Dimensions – LxWxH	Ø218x56 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

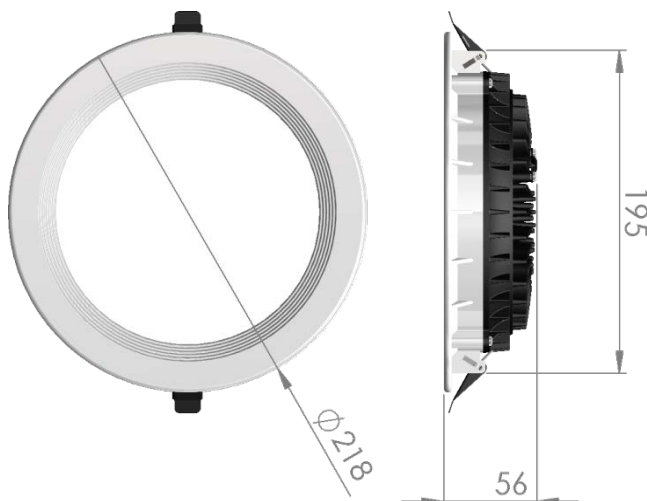

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.